



SLIDE-PAC™ CONVEYORS

Quickly and Safely Roll Conveyors From Transport to Operation Instead of Risky Lifting



SLIDE-PAC TRANSFER CONVEYORS



IN APPLICATION


Rock Face to Load Out™




HIGHLIGHTS



SPECIFICATIONS

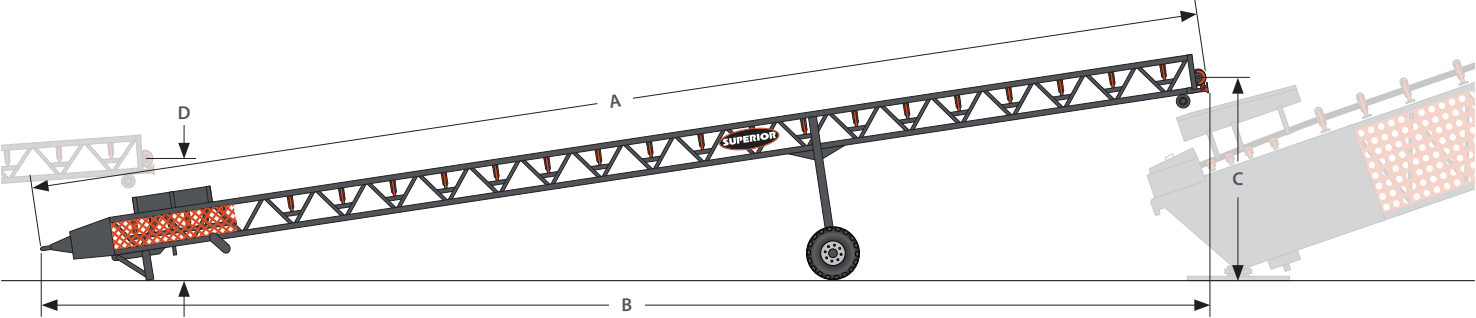

OPERATING DIMENSIONS									
	60'			70'			80'		
	Top Unit	Middle Unit	Trailer Unit	Top Unit	Middle Unit	Trailer Unit	Top Unit	Middle Unit	Trailer Unit
(A) Conveyor Length (m)	59'-8" (18.2)	59'-8" (18.2)	59'-8" (18.2)	69'-8" (21.2)	69'-8" (21.2)	69'-8" (21.2)	79'-8" (24.2)	79'-8" (24.2)	79'-8" (24.2)
(B) Conveyor Ground Length (m)	58'-9" (17.9)	59'-6" (18.1)	59'-7" (18.1)	68'-11" (21.0)	69'-3" (21.1)	69'-6" (21.1)	79'-1" (24.1)	79'-4" (24.1)	79'-8" (24.2)
(C) Raised Height to Center of Pulley (m)	12'-9" (3.8)	10'-2" (3.0)	7'-3" (2.2)	12'-10" (3.9)	10'-4" (3.1)	7'-0" (2.1)	12'-3" (3.7)	9'-11" (3.0)	6'-10" (2.0)
(D) Lowered Height to Center of Pulley (m)	7'-6" (2.2)	7'-5" (2.2)	6'-8" (2.0)	7'-6" (2.2)	7'-6" (2.2)	6'-6" (1.9)	7'-3" (2.2)	7'-3" (2.2)	6'-6" (2.0)

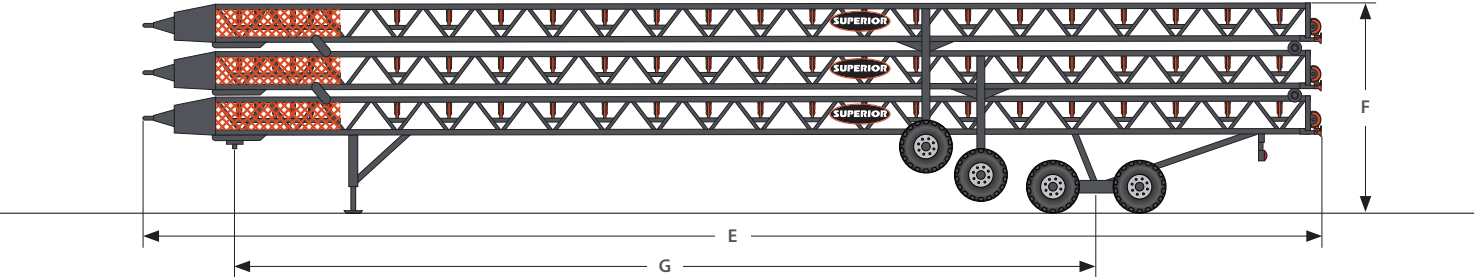

TRANSPORT DIMENSIONS				
	36" x 60'	36" x 70'	42" x 70'	36" x 80'
(E) Travel Length (m)	59'-0" (18.0)	69'-0" (21.0)	69'-0" (21.0)	79'-0" (24.0)
(F) Travel Height (m)	13'-6" (4.1)	13'-6" (4.1)	13'-6" (4.1)	13'-6" (4.1)
Travel Width (m)	10'-1" (3.0)	9'-11" (3.0)	10'-10" (3.3)	9'-11" (3.0)
(G) Kingpin to Axle (m)	44'-9" (13.6)	54'-9" (16.6)	54'-9" (16.6)	64'-9" (19.7)
Weight at Axle (kg)	18,945 (8,593)	21,000 (9,525)	24,300 (11,022)	22,044 (9,998)
Weight at Kingpin (kg)	10,018 (4,544)	12,800 (5,805)	15,600 (7,076)	13,871 (6,291)