



SLIDE-STAC™ CONVEYORS

Three Radial Stacking Conveyors Packed in One Towable Load



SLIDE-STAC CONVEYORS




SUPERIOR COMPONENTS


Rock Face to Load Out™



SPECIFICATIONS

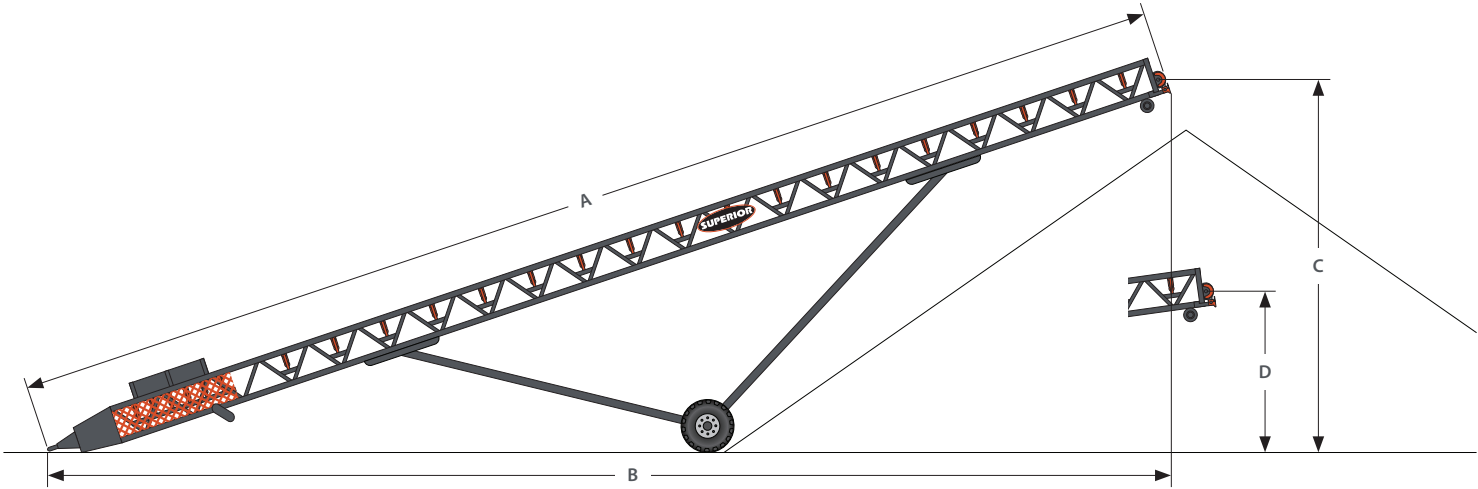

OPERATING DIMENSIONS						
	36" x 60'			36" x 70'		
	Top Unit	Middle Unit	Trailer Unit	Top Unit	Middle Unit	Trailer Unit
(A) Conveyor Length (m)	59' -8" (18.2)	59' -8" (18.2)	59' -8" (18.2)	69' -8" (21.2)	69' -8" (21.2)	69' -8" (21.2)
(B) Conveyor Ground Length (m)	56' -6" (17.2)	59' -9" (18.2)	56' -9" (17.3)	66' -0" (20.1)	66' -1" (20.1)	66' -3" (20.2)
(C) Raised Height to Center of Pulley (m)	20' -7" (6.2)	19' -10" (6.0)	19' -11" (6.0)	23' -8" (7.2)	23' -6" (7.1)	23' -1" (7.0)
(D) Lowered Height to Center of Pulley (m)	8' -9" (2.6)	8' -4" (2.5)	7' -10" (2.3)	10' -3" (3.1)	9' -9" (2.9)	7' -6" (2.2)
Highest Incline Angle	18.8°	17.8°	18.0°	18.5°	18.4°	18.0°

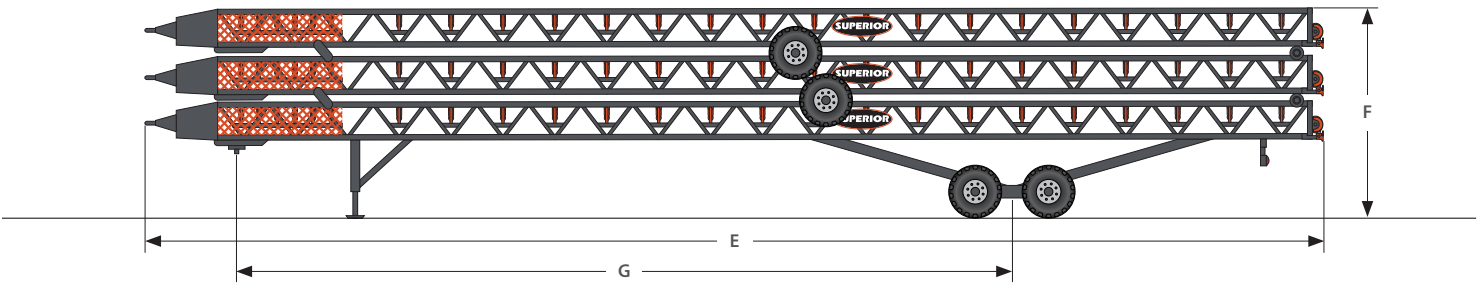

TRANSPORT DIMENSIONS		
	36" x 60'	36" x 70'
(E) Travel Length (m)	59' -0" (18.0)	69' -0" (21.0)
(F) Travel Height (m)	13' -1" (4.0)	13' -5" (4.0)
Travel Width (m)	11' -11" (3.6)	11' -11" (3.6)
(G) Kingpin to Axle (m)	36' -11" (11.2)	49' -2" (15.0)
Weight at Axle (kg)	24,659 (11,185)	28,263 (12,819)
Weight at Kingpin (kg)	6,752 (3,062)	11,193 (5,077)